

An underwater photograph of a humpback whale swimming towards the camera. The water is a deep, clear blue. Above the whale, the surface of the water is visible, with sunlight filtering through, creating a shimmering, golden glow. The whale's head is in the foreground, showing its characteristic bumps (warts) and baleen. Its tail is visible behind it, and its flippers are extended.

2022

TAKING INNOVATION TO NEW DEPTHS

bigblue[®]

THE BRIGHTER IDEA



C o n t e n t

AL250	P.82	Camera Arms	P.104	Gloves, Hoods & Handles	P.99	VL4600P	P.30
AL250 Camouflage	P.73	Camera Clips & Accessories	P.104	HL450N	P.89	VL4600PB	P.14
AL450WM Tail	P.80	Camera Trays	P.94	HL450XW	P.89	VL9000P Tri Color	P.28
AL450WM Tail Camouflage	P.72	Camera Filters	P.91	HLI000N	P.88	VLI1000P	P.26
AL450NM Tail II	P.81	CB4000P	P.42	HLI000XW	P.88	VLI0000PBRC	P.8
AL450NM Tail II Camouflage	P.71	CB7200P	P.40	Light Filters	P.100	VLI8000P Pro Mini	P.24
AL450 Strobe	P.69	CB7200PB	P.12	Light Head	P.63	VLI8000PBRC	P.4
ALI200RAFO	P.79	CB10000P	P.38	Outdoor Dry Bags	P.102	VLI8000P Pro Mini Tri Color	P.22
ALI300NP	P.76	CB10000PBRC	P.10	Optical Fibre	P.99	VL36000P	P.20
ALI300NP Camouflage	P.70	CB15000P	P.36	Protective Case Series	P.90	VL65000P	P.18
ALI200NP IR	P.17	CB15000PBRC	P.6	RGB White II	P.83	VTL2600P	P.53
ALI300WVP	P.77	CB30000P II	P.34	Red Spot Light & Green Spot Light	P.90	VTL4200P	P.52
ALI200WP IR	P.17	CB60000P	P.32	Snoots	P.100	VTL8000P	P.50
ALI300XWVP	P.76	CF450M	P.86	Sport Water Bottle	P.107	VTL8000P Max	P.46
ALI300NP Tail	P.74	CFI200P II	P.85	Spring Cord	P.101	VTL8000P Backmount / Sidemount	P.48
ALI300WP Tail	P.75	CFI800P	P.84	TL2600P	P.62	VTLI0000P	P.44
ALI300 Strobe	P.68	Chargers	P.97	TL3800P	P.61		
ALI800NP II	P.66	Combo Packs	P.92	TL3800P Supreme	P.60		
ALI800WP	P.67	Controller	P.98	TL5200P	P.58		
ALI800P Tri Color II	P.65	Easy Clip Lights	P.87	TL5200P Backmount / Sidemount	P.56		
AL2600XWP II	P.64	Easy Release Mount Series	P.102	TL8000P	P.54		
AL2600XWPB	P.16	Float Arms, Flexi Arms	P.103				
Ambient Filters	P.98	Fluorodive Kits	P.91				
Backpack	P.106						
Batteries	P.96						



VL33000 PRC

Li ion Rechargeable Battery Ultra Power LED Video Light with Remote Control Option



33000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

- 4 levels of brightness 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Easy to change up the battery pack BATCELL21700x8
- Built-in red color led enhances focusing performance
- 45pcs XML LED to provide 33000 lumens
- Comes with ball joint for easy system setup
- Place to insert the optical fibre
- Comes with protective case for VL33000PRC
- Ergonomic aluminum handle comes in a package
- Optical fibre. Sold separately.
- Controller kit set. Sold separately.
- Set-up for the Controller.

SPECIFICATIONS

Light source	45 x XML LED + 10 x XPE Red LED
Light output	3300 Lm (level I), 8250 Lm (level II) 16500 Lm (level III), 33000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x8
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L. 144.6mm
Weight in air	1391 g (including battery)
Buoyancy in seawater	-597 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



VL18000 PBRC

Li ion Rechargeable Battery
Super Power LED Video Light
with Blue Light with Remote
Control Option



18000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM



- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- BATCELL I8650x7 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
- Ergonomic aluminum handle comes in a package
- 24pcs XML LED to provide 18000 lumens
- Comes with ball joint for easy system setup
- Comes with protective case for VL 18000PBRC
- Comes with yellow plate.
- Optical fibre. Sold separately.
- Controller kit set. Sold separately.
- Set-up for the Controller.



SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED + 14 x XPE Blue LED
Light output	4500 Lm (level I), 9000 Lm (level II), 18000 Lm (level III)
Light output (Red color mode)	1000 Lm
Light output (Blue color mode)	113 Lm (level I), 225 Lm (level II), 450 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 142.5mm
Weight in air	774 g (including battery)
Buoyancy in seawater	-291 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



CB15000_{PBRC}

Li ion Rechargeable Battery Super Power LED Video Light with High Color Rendering Index with Blue Light with Remote Control Option

Fluorodiving Performance



15000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL18650x7 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
- COB LED to provide 15000 lumens
- Place to insert the optical fibre.
- Comes with ball joint for easy system setup
- Ergonomic aluminum handle comes in a package
- Comes with protective case for CB 15000PBRC.
- Comes with yellow plate.
- Optical fibre. Sold separately.
- Controller kit set. Sold separately.
- Set-up for the Controller.



SPECIFICATIONS

Light source	COB LED + 8 x XPE Red LED + 8 XPE Blue LED
Light output	3750 Lm (level I), 7500 Lm (level II), 15000 Lm (level III)
Light output (Red color mode)	1000 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL18650x7
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra85
Burn time	1.5 hrs (level III), 3 hrs (level II) and 6 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 142.5mm
Weight in air	787 g (including battery)
Buoyancy in seawater	-304 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



VL10000 PBRC

Li ion Rechargeable Battery High Power LED Video Light with Blue Light with Remote Control Option

Fluorodiving Performance



- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- BATCELL I8650x4 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
- Comes with ball joint for easy system setup
- Removable yellow filter enhances warmer color tone
- Sturdy glove for hands-free operation underwater
- Comes with yellow plate.
- Comes with random color outdoor dry bag
- Optical fibre. Sold separately.
- Controller kit set. Sold separately.
- Set-up for the Controller.



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED + 8 XPE Blue LED
Light output	2500 Lm (level I), 5000 Lm (level II), 10000 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level III), 5 hrs (level II) and 10 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	467 g (including battery)
Buoyancy in seawater	-184 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator



CB10000 PBRC

Li ion Rechargeable Battery High Power LED Video Light with High Color Rendering Index with Blue Light with Remote Control Option

Fluorodiving Performance



- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL21700x4 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
- Comes with ball joint for easy system setup
- Place to insert the optical fibre.
- Snoot connector for CB 10000PBRC. Sold separately.
- Sturdy glove for hands-free operation underwater
- Comes with yellow plate.
- Comes with random color outdoor dry bag
- Optical fibre. Sold separately.
- Controller kit set. Sold separately.
- Set-up for the Controller.




SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED + 8 x XPE Blue LED
Light output	2500 Lm (level I) 5000 Lm (level II), 10000 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra85
Burn time	1.5 hrs (level III), 3 hrs (level II) and 6 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 140.6mm
Weight in air	679 g (including battery)
Buoyancy in seawater	-283g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

SPECIFICATIONS for CONTROLLER

Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	CR2032x2
Maximum depth	100 m tested
Size	Dia. 30 x L. 98.3mm
Weight in air	110 g (including battery)
Buoyancy in seawater	-51 g (including battery)
Switching system	Push button with battery indicator

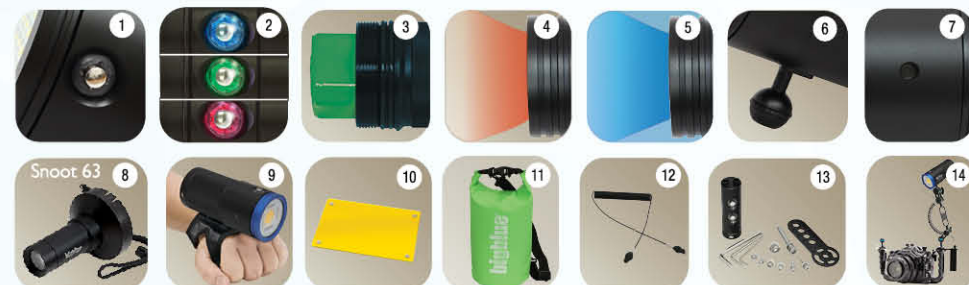

CB7200 PB

Li ion Rechargeable Battery
High Power LED Video Light
with High Color Rendering Index
with Blue Light

Fluorodiving Performance



- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- BATCELL21700x4 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
- Snoot connector for CB 7200PB. Sold separately.
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- Comes with random color outdoor dry bag
- Comes with yellow plate.



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED + 8 x XPE Blue LED
Light output	1800 Lm (level I), 3600 Lm (level II), 7200 Lm (level III)
Light output (Red color mode)	500 Lm
Light output (Blue color mode)	55 Lm (level I), 110 Lm (level II), 220 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	653g (including battery)
Buoyancy in seawater	-272g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included



VL4600 PB

Li ion Rechargeable Battery LED
Video Light with Blue Light

Fluorodiving Performance




- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL36250 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result.
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- Removable yellow filter enhances warmer color tone
- Comes with USB charger
- Comes with random color outdoor dry bag
- Comes with yellow plate.



SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED + 4 x XPE Blue LED
Light output	1150 Lm (level I), 2300 Lm (level II) 4600 Lm (level III)
Light output (Red color mode)	300 Lm
Light output (Blue color mode)	30 Lm (level I), 60 Lm (level II) 120 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level III), 3 hrs (level II) and 6 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included





AL2600 XWPB

Black Molly VB



Fluorodiving Performance



SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED + 2 x XPE Blue LED
Light output	650 Lm (level I), 1300 Lm (level II), 2600 Lm (level III)
Light output (Red color mode)	150 Lm
Light output (Blue color mode)	15 Lm (level I), 30 Lm (level II), 60 Lm (level III)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8mm
Weight in air	218g (including battery)
Buoyancy in seawater	-105g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included
Yellow plate	Included

- 3 levels of brightness for cool white mode, 3 levels of brightness for blue color light, 1 level of brightness for red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Built-in red color led enhances focusing performance
- Built-in blue color led for fluorodiving performance. Go with yellow plate for better result
- Removable yellow filter enhances warmer color tone
- Comes with yellow plate.
- BATCELL26650 Li ion Rechargeable Battery
- Comes with ball joint for easy system setup
- Protective case for AL 2600XWPB. Sold separately.
- Protective case for AL 2600XWPB and Single Arm Tray. Sold separately.
- Comes with random color outdoor dry bag



AL1200 NPIR



940mm IR



SPECIFICATIONS

Light source	IR (940nm)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



4 levels of brightness, and SOS controlled by a reliable push button design



BATCELL 18650 Li ion Rechargeable Battery



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

AL1200 WPIR



Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	IR (940nm)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



VL65000_P

Li ion Rechargeable Battery
Huge Power LED Video Light



THE MOST BRIGHTNESS
65000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

- 4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design. Press two keys at the same time to come up 100%, 50%, 25%, 10% four power level setting.
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- 2x BATCELL60000 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Easy to charge up the battery pack BATCELL60000
- 72pcs XML LED to provide 65000 lumens
- Comes with ball joint for easy system setup
- Make use of double clip and single arm to make the handle. Comes in a package.
- Comes with protective case for VL65000P.



65000
lumens

SPECIFICATIONS

Light source	72 x XML LED + 20 x XPE Red LED
Light output	6500 Lm (level I), 16250 Lm (level II) 32500 Lm (level III), 65000 Lm (level IV)
Light output (Red color mode)	2000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 2x BATCELL60000
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 120 x L. 240 mm
Weight in air	3766g (including battery)
Buoyancy in seawater	-1107g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



VL36000_P

Li ion Rechargeable Battery
Ultra Power LED Video Light



36000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Easy to charge up the battery pack BATCELL 21700x8
4. Built-in red color led enhances focusing performance

5. 45pcs XML LED to provide 36000 lumens
6. Comes with ball joint for easy system setup
7. Ergonomic aluminum handle comes in a package
8. Comes with protective case for VL36000P.



SPECIFICATIONS

Light source	45 x XML LED + 10 x XPE Red LED
Light output	3600 Lm (level I), 9000 Lm (level II) 18000 Lm (level III), 36000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x8
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L. 144.6 mm
Weight in air	1391g (including battery)
Buoyancy in seawater	-597g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



VL18000P

PRO MINI
TRI COLOR

Li ion Rechargeable Battery
Super Power LED Video Light
with Three Color Output



18000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM



SPECIFICATIONS

Light source	32 x XML LED + 8 x XPE Red LED
Light output (Cool white mode)	4500 Lm (level I), 9000 Lm (level II) 18000 Lm (level III)
Light output (Warm white mode)	2000 Lm (level I), 4000 Lm (level II) 8000 Lm (level III)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLI8650x7
Angle of light beam	160° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	772 g (including battery)
Buoyancy in seawater	-313 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode, 1 level of brightness of Red color mode, and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELLI8650x7 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in yellow color led enhances warmer color tone
- Ergonomic aluminum handle comes in a package
- FILFLUORO15000 Fluorodive filter for VL 18000P Pro Mini Tri Color. Sold separately.
- Comes with ball joint for easy system setup
- Comes with protective case for VL 18000P Pro Mini Tri Color.



VL18000P

PRO
MINI

Li ion Rechargeable Battery
Super Power LED Video Light



18000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

- 4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL I8650x7 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- 24pcs XML LED to provide 18000 lumens
- Ergonomic aluminum handle comes in a package
- FILFLUORO I5000 Fluorodive filter for VL 18000P Pro Mini. Sold separately.
- Comes with ball joint for easy system setup
- Comes with protective case for VL 18000P Pro Mini.



SPECIFICATIONS

Light source	24 x XML LED + 8 x XPE Red LED
Light output	1800 Lm (level I), 4500 Lm (level II) 9000 Lm (level III), 18000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	757 g (including battery)
Buoyancy in seawater	-298 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VL11000_P

Li ion Rechargeable Battery
High Power LED Video Light



SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output	1100 Lm (level I), 2750 Lm (level II) 5500 Lm (level III), 11000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457g (including battery)
Buoyancy in seawater	-173g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 Levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL I8650x4 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Removable yellow filter enhances warmer color tone
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- Comes with random color outdoor dry bag



VL9000P | TRI COLOR

Li ion Rechargeable Battery
High Power LED Video Light
with Three Color Output



Upgraded

Changeable
light head

BUILT-IN
YELLOW
LIGHT

BUILT-IN
RED
LIGHT

ERM
EASY RELEASE
MOUNT

9000
lumens

SPECIFICATIONS

Light source	15 x XML LED + 6 x XPE Red LED
Light output (Cool white mode)	2250 Lm (level I), 4500 Lm (level II) 9000 Lm (level III)
Light output (Warm white mode)	1125 Lm (level I), 2250 Lm (level II) 4500 Lm (level III)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.4 x L. 130.6mm
Weight in air	457 g (including battery)
Buoyancy in seawater	-173 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode | level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL I8650x4 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Built-in yellow color led enhances warmer color tone
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- Comes with random color outdoor dry bag



VL4600_P

Li ion Rechargeable Battery LED Video Light



Available in 3 colors



SPECIFICATIONS

Light source	6 x XML LED + 4 x XPE Red LED
Light output (Flood beam mode)	460 Lm (level I), 1150 Lm (level II) 2300 Lm (level III), 4600 Lm (level IV)
Light output (Red color mode)	300 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 121.1 mm
Weight in air	318 g (including battery)
Buoyancy in seawater	-167 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 levels of brightness for Flood beam mode, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL 32650 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance

- Comes with ball joint for easy system setup
- Removable yellow filter enhances warmer color tone
- Sturdy glove for hands-free operation underwater
- Comes with USB charger
- Comes with random color outdoor dry bag



CB60000P

Li ion Rechargeable Battery
Huge Power LED Video Light with
High Color Rendering Index



60000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

- 4 levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design. Press two keys at the same time to come up 100%, 50%, 25%, 10% four power level setting.
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- 2xBATCELL60000 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Easy to charge up the battery pack BATCELL60000
- COB LED to provide 60000 lumens
- Comes with ball joint for easy system setup
- Make use of double clip and single arm to make the handle. Comes in a package.
- Comes with protective case for CB 60000P.



SPECIFICATIONS

Light source	COB LED + 20 x XPE Red LED
Light output	6000 Lm (level I), 15000 Lm (level II) 30000 Lm (level III), 60000 Lm (level IV)
Light output (Red color mode)	2000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 2xBATCELL60000
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 120 x L. 240 mm
Weight in air	3766g (including battery)
Buoyancy in seawater	-1107g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



CB30000 PII

Li ion Rechargeable Battery Ultra Power LED Video Light with High Color Rendering Index



30000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

1. 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL21700x8 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. COB LED to provide 30000 lumens
6. Comes with ball joint for easy system setup
7. Ergonomic aluminum handle comes in a package
8. Comes with protective case for CB30000P II.



SPECIFICATIONS

Light source	COB LED + 10 x XPE Red LED
Light output	3000 Lm (level I), 7500 Lm (level II) 15000 Lm (level III), 30000 Lm (level IV)
Light output (Red color mode)	1200 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL21700x8
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 85 x L. 144.6mm
Weight in air	1391 g (including battery)
Buoyancy in seawater	-597g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



CB15000_P

Li ion Rechargeable Battery Super Power
LED Video Light with High Color
Rendering Index



15000 LUMENS
ANGLE OF LIGHT BEAM
160° WIDE BEAM

- 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- BATCELL I8650x7 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- COB LED to provide 15000 lumens
- Comes with ball joint for easy system setup
- Ergonomic aluminum handle comes in a package
- Comes with protective case for CB15000P.
- FILFLUORO I5000 Fluorodive filter for CB15000P. Sold separately.



SPECIFICATIONS

Light source	COB LED + 8 x XPE Red LED
Light output	1500 Lm (level I), 3750 Lm (level II) 7500 Lm (level III), 15000 Lm (level IV)
Light output (Red color mode)	1000 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	160° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 70 x L. 136mm
Weight in air	776g (including battery)
Buoyancy in seawater	-317g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



CB10000_P

Li ion Rechargeable Battery High Power LED Video Light with High Color Rendering Index




SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	654g (including battery)
Buoyancy in seawater	-273g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL21700x4 Li ion Rechargeable Battery

4. Built-in red color led enhances focusing performance
5. Snoot connector for CB 10000P.Sold separately.
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. Comes with random color outdoor dry bag



CB7200_P

Li ion Rechargeable Battery High Power LED Video Light with High Color Rendering Index



SPECIFICATIONS

Light source	COB LED + 6 x XPE Red LED
Light output	720 Lm (level I), 1800 Lm (level II) 3600 Lm (level III), 7200 Lm (level IV)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL 21700x4
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 134.6mm
Weight in air	653g (including battery)
Buoyancy in seawater	-272g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
3. BATCELL21700x4 Li ion Rechargeable Battery
4. Built-in red color led enhances focusing performance

5. Snoot connector for CB 7200P. Sold separately.
6. Sturdy glove for hands-free operation underwater
7. Comes with ball joint for easy system setup
8. Comes with random color outdoor dry bag



CB4000_P

Li ion Rechargeable Battery
LED Video Light with High
Color Rendering Index



SPECIFICATIONS

Light source	COB LED + 4 x XPE Red LED
Light output	400 Lm (level I), 1000 Lm (level II) 2000 Lm (level III), 4000 Lm (level IV)
Light output (Red color mode)	300 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x3
Angle of light beam	120° wide beam
Color temperature	5000K
Color Rendering Index	Ra 85
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 50 x L. 130.3mm
Weight in air	393g (including battery)
Buoyancy in seawater	-168g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 levels of brightness | level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- BATCELL I8650x3 Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- Comes with random color outdoor dry bag



VTL10000_P

Li ion Rechargeable Battery High Power
LED Video / Tech Light




120° WIDE BEAM
10° NARROW BEAM

- 4 Levels of brightness for Flood beam mode, and 1 level of brightness for Spot beam mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- Removable red filter enhances focusing performance
- Removable yellow filter enhances warmer color tone
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- BATCELLI8650x4 Li ion Rechargeable Battery
- Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	16 x XML LED
Light output (Flood beam mode)	1000 Lm (level I), 2500 Lm (level II) 5000 Lm (level III), 10000 Lm (level IV)
Light output (Spot beam mode)	1300 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLI8650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	2.5 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 25 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



VTL8000P MAX

Li ion Rechargeable Battery High Power
LED Video / Tech Light



120° WIDE BEAM
10° NARROW BEAM




SPECIFICATIONS

Light source	13 x LED + 6 x XPE Red LED
Light output (Flood beam mode)	2000 Lm (level I) 4000 Lm (level II), 8000 Lm (level III)
Light output (Spot beam mode)	650 Lm (level I) 1300 Lm (level II), 2600 Lm (level III)
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level III), 6 hrs (level II) and 12 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 3 Levels of brightness for Flood beam mode, 3 levels of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color /Green color / Red color / Flash Red color
- Angle of light beam
- Built-in red color led enhances focusing performance

- Removable yellow filter enhances warmer color tone
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- BATCELL I8650x4 Li ion Rechargeable Battery
- Comes with random color outdoor dry bag



VTL8000^P Backmount

Li ion Rechargeable Battery
High Power LED Video/
Tech Light with
Battery Canister




8000 / 1200
Lumens / Lumens
WIDE SPOT

120° WIDE BEAM
10° NARROW BEAM

SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 63 x L. 106.5mm
Size (Canister)	Dia. 60 x L. 202mm
Weight in air (Light head)	317g
Weight in air (Canister)	975g
Buoyancy in seawater (Light head)	-101g
Buoyancy in seawater (Canister)	-384g
Switching system	Push button with battery indicator
Cable Length	1.2 meters
Front glass	Tempered optical glass

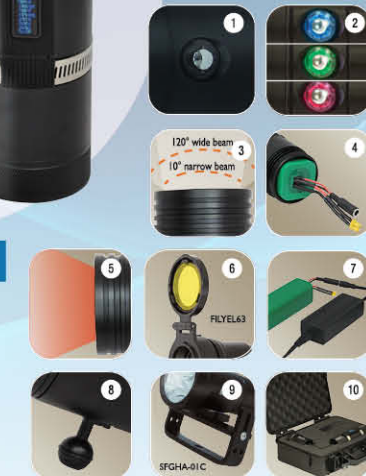

- 4 Levels of brightness for Flood beam mode, 1 levels of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- BATCELLCANISTER Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Removable yellow filter enhances warmer color tone
- Easy to charge up the battery BATCELLCANISTER
- Comes with ball joint for easy system setup
- Slim fit Goodman handle with connector. Comes in a package
- Comes with protective case for VTL 8000P Backmount.

VTL8000^P Sidemount

Li ion Rechargeable Battery
High Power LED Video/
Tech Light with
Battery Canister




8000 / 1200
Lumens / Lumens
WIDE SPOT

120° WIDE BEAM
10° NARROW BEAM

SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	6 hrs (level IV), 12 hrs (level III) 24 hrs (level II) and 60 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 63 x L. 106.5mm
Size (Canister)	Dia. 60 x L. 212mm
Weight in air (Light head)	317g
Weight in air (Canister)	1033g
Buoyancy in seawater (Light head)	-101g
Buoyancy in seawater (Canister)	-407g
Switching system	Push button with battery indicator
Cable Length	1.35 meters
Front glass	Tempered optical glass

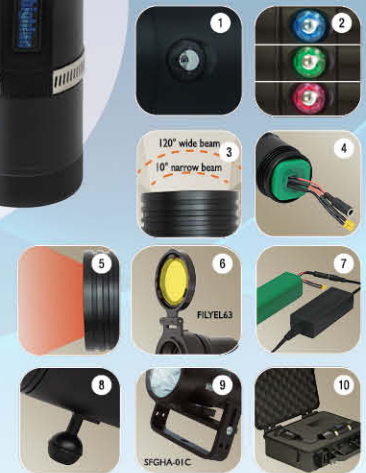

- 4 Levels of brightness for Flood beam mode, 1 levels of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- BATCELLCANISTER Li ion Rechargeable Battery
- Built-in red color led enhances focusing performance
- Removable yellow filter enhances warmer color tone
- Easy to charge up the battery BATCELLCANISTER
- Comes with ball joint for easy system setup
- Slim fit Goodman handle with connector. Comes in a package
- Comes with protective case for VTL 8000P Sidemount.

VTL8000P

Li ion Rechargeable Battery High Power
LED Video / Tech Light



120° WIDE BEAM
10° NARROW BEAM


- 4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- Built-in red color led enhances focusing performance

- Removable yellow filter enhances warmer color tone
- Sturdy glove for hands-free operation underwater
- Comes with ball joint for easy system setup
- BATCELL I8650x4 Li ion Rechargeable Battery
- Comes with random color outdoor dry bag



SPECIFICATIONS

Light source	11 x XML LED + 6 x XPE Red LED
Light output (Flood beam mode)	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Light output (Spot beam mode)	1200 Lm
Light output (Red color mode)	500 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 63 x L. 150.3mm
Weight in air	548g (including battery)
Buoyancy in seawater	-203g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included





VTL4200P

Li ion Rechargeable Battery
LED Video / Tech Light



120° WIDE BEAM
10° NARROW BEAM

SPECIFICATIONS


Light source	7 x XML LED + 2 x XPE Red LED
Light output (Flood beam mode)	420 Lm (level I), 1050 Lm (level II) 2100 Lm (level III), 4200 Lm (level IV)
Light output (Spot beam mode)	1300 Lm
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	120° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 55.5 x L. 140.6 mm
Weight in air	432 g (including battery)
Buoyancy in seawater	-205 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- Sturdy glove for hands-free operation underwater
- Built-in red color led enhances focusing performance.
- Removable yellow filter enhances warmer color tone
- Comes with ball joint for easy system setup
- BATCELL 32650 Li ion Rechargeable Battery
- Comes with USB charger
- Comes with random color outdoor dry bag



VTL2600P

Li ion Rechargeable Battery
LED Video / Tech Light



100° WIDE BEAM
10° NARROW BEAM

Available in 3 colors

SPECIFICATIONS

Light source	7 x LED + 2 x XPE Red LED
Light output (Flood beam mode)	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Spot beam mode)	1000 Lm
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	100° wide beam and 10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 44 x L. 128.7 mm
Weight in air	339 g (including battery)
Buoyancy in seawater	-177 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 Levels of brightness for Flood beam mode, 1 level of brightness for Spot beam mode and 1 level of brightness for Red color mode controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Angle of light beam
- Sturdy glove for hands-free operation underwater
- Built-in red color led enhances focusing performance.
- Removable yellow filter enhances warmer color tone
- Comes with ball joint for easy system setup
- BATCELL 32650 Li ion Rechargeable Battery
- Comes with random color outdoor dry bag

TL8000P

Li ion Rechargeable Battery Super Power LED Tech Light



SPECIFICATIONS

Light source	8 x LED
Light output	800 Lm (level I), 2000 Lm (level II) 4000 Lm (level III), 8000 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x7
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 78 x L. 143.8 mm
Weight in air	830 g (including battery)
Buoyancy in sea-water	-313 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

1. 4 levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL I8650x7 Li ion Rechargeable Battery
4. Ergonomic aluminum handle comes in a package
5. Slim fit Goodman handle with connector. Comes in a package
6. Comes with random color outdoor dry bag



TL5200^P Backmount

Li ion Rechargeable Battery
High Power LED Tech Light
with Battery Canister



ERM
EASY RELEASE
MOUNT

5200
lumens

SPECIFICATIONS

Light source	4 x XML LED
Light output	520 Lm (level I), 1300 Lm (level II) 2600 Lm (level III), 5200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 60 x L. 202mm
Weight in air (Light head)	380g
Weight in air (Canister)	975g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-384g
Switching system	Push button with battery indicator
Cable Length	1.2 meters
Front glass	Tempered optical glass



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELLCANISTER Li ion Rechargeable Battery
4. Slim fit Goodman handle with connector. Comes in a package
5. Easy to charge up the battery
BATCELLCANISTER
6. Comes with protective case for TL 5200P Backmount.

TL5200^P Sidemount

Li ion Rechargeable Battery
High Power LED Tech Light
with Battery Canister



ERM
EASY RELEASE
MOUNT

5200
lumens

SPECIFICATIONS

Light source	4 x XML LED
Light output	520 Lm (level I), 1300 Lm (level II) 2600 Lm (level III), 5200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELLCANISTER
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	7 hrs (level IV), 14 hrs (level III) 28 hrs (level II) and 70 hrs (level I)
Maximum depth	100 m tested
Size (Light head)	Dia. 72 x L. 88.3mm
Size (Canister)	Dia. 60 x L. 212mm
Weight in air (Light head)	380g
Weight in air (Canister)	1033g
Buoyancy in seawater (Light head)	-134g
Buoyancy in seawater (Canister)	-407g
Switching system	Push button with battery indicator
Cable Length	1.35 meters
Front glass	Tempered optical glass



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELLCANISTER Li ion Rechargeable Battery
4. Slim fit Goodman handle with connector. Comes in a package
5. Easy to charge up the battery
BATCELLCANISTER
6. Comes with protective case for TL 5200P Sidemount.

TL5200_P

Li ion Rechargeable Battery High Power LED Tech Light



SPECIFICATIONS

Light source	4 x XML LED
Light output	520 Lm (level I), 1300 Lm (level II) 2600 Lm (level III), 5200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 72 x L. 150.3mm
Weight in air	596 g (including battery)
Buoyancy in sea-water	-222 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- BATCELL I8650x4 Li ion Rechargeable Battery
- Sturdy Goodman Glove for handy Tech-dive operation
- Ergonomic aluminum handle comes in a package
- Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
- Comes with random color outdoor dry bag



TL3800^P Supreme

Li ion Rechargeable Battery
LED Tech Light



SPECIFICATIONS

Light source	3 x XML LED
Light output	380 Lm (level I), 950 Lm (level II) 1900 Lm (level III), 3800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack BATCELL I8650x4SUPREME
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	3 hrs (level IV), 6 hrs (level III) 12 hrs (level II) and 30 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63 x L. 125 mm
Weight in air	517 g (including battery)
Buoyancy in seawater	-221 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Ergonomic aluminum handle comes in a package
4. BATCELL I8650x4 SUPREME Li ion Rechargeable Battery
5. Sturdy Goodman Glove for handy Tech-diver operation
6. Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
7. Comes with random color outdoor dry bag

TL3800^P

Li ion Rechargeable Battery
LED Tech Light



SPECIFICATIONS

Light source	3 x XML LED
Light output	380 Lm (level I), 950 Lm (level II) 1900 Lm (level III), 3800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 63 x L. 135.6 mm
Weight in air	447 g (including battery)
Buoyancy in seawater	-217 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Ergonomic aluminum handle comes in a package
4. BATCELL 32650 Li ion Rechargeable Battery
5. Sturdy Goodman Glove for handy Tech-diver operation
6. Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
7. Comes with USB charger
8. Comes with random color outdoor dry bag

TL2600_P

Li ion Rechargeable Battery
LED Tech Light



Available in 3 colors

SPECIFICATIONS

Light source	3 x LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 32650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 50 x L. 130 mm
Weight in air	359 g (including battery)
Buoyancy in seawater	-188 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



- 4 Levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Sturdy Goodman Glove for handy Tech-dive operation
- BATCELL 32650 Li ion Rechargeable Battery
- Ergonomic aluminum handle comes in a package
- Goodman handle with connector or Slim fit Goodman handle with connector. Sold separately.
- Comes with random color outdoor dry bag

LIGHT HEAD





AL2600 Black Molly V XWP II



Available in 2 colors

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output	260 Lm (level I), 650 Lm (level II) 1300 Lm (level III), 2600 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



- 4 Levels of brightness, 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Built-in red color led enhances focusing performance
- Removable yellow filter enhances warmer color tone
- BATCELL26650 Li ion Rechargeable Battery
- Comes with ball joint for easy system setup
- Protective case for AL 2600XWP II and Single Arm Tray. Sold separately.
- Protective case for AL 2600XWP II. Sold separately.
- Comes with random color outdoor dry bag



AL1800 Black Molly IV XWP II Tri Color



Available in 2 colors

SPECIFICATIONS

Light source	4 x XML LED + 2 x XPE Red LED
Light output (Cool white mode)	450 Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Warm white mode)	450 Lm (level I), 900 Lm (level II) 1800 Lm (level III)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	120° wide beam
Color temperature	6500K cool white and 5500K warm white
Burn time	2 hrs (level III), 4 hrs (level II) and 8 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.8 mm
Weight in air	218 g (including battery)
Buoyancy in seawater	-105 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



- 3 Levels of brightness for cool white mode, 3 Levels of brightness for warm white mode 1 level of brightness of Red color mode and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Built-in red color led enhances focusing performance
- Built in yellow color led enhances warmer color tone
- BATCELL26650 Li ion Rechargeable Battery
- Comes with ball joint for easy system setup
- Protective case for AL 1800XWP Tri Color II and Single Arm Tray. Sold separately.
- Protective case for AL 1800XWP Tri Color II. Sold separately.
- Comes with random color outdoor dry bag



AL1800_{NP II}

Li ion Rechargeable Battery
Narrow Beam LED Light



Available in 2 colors

SPECIFICATIONS

Light source	XML x LED
Light output	180 Lm (level I), 450 Lm (level II), 900 Lm (level III), 1800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III), 6 hrs (level II) and 15 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 35.5 x L. 139.8 mm
Weight in air	235 g (including battery)
Buoyancy in seawater	-113 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL26650 Li ion Rechargeable Battery
4. Comes with USB charger
5. Comes with random color outdoor dry bag



AL1800_{WP}

Li ion Rechargeable Battery
Wide Beam LED Light



Available in 2 colors

SPECIFICATIONS

Light source	XML x LED
Light output	180 Lm (level I), 450 Lm (level II), 900 Lm (level III), 1800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III), 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 129 mm
Weight in air	228 g (including battery)
Buoyancy in seawater	-120 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. BATCELL26650 Li ion Rechargeable Battery
4. Comes with ball joint for easy system setup
5. Removable red and yellow filters enhances focusing performances and warm color tone
6. Snoot Connector for AL1800WP. Sold separately.
7. Comes with USB charger
8. Comes with random color outdoor dry bag



AL1300 Strobe

Li ion Rechargeable Battery
LED Strobe Light



SPECIFICATIONS

Light source	XML LED
Light output	1300 Lm
Blinking frequency	60 pulses per minute
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	270°
Burn time	12 hrs
Maximum depth	150 m tested
Size	Dia. 35.5 x L. 152.6 mm
Weight in air	170 g (including battery)
Buoyancy in seawater	-81 g (including battery)
Switching system	Push button with battery indicator
Lanyard	Included



1. On / Off controlled by a reliable push button design
2. Battery level indicator built-in: Blue color /Green color /Red color /Flash Red color
3. BATCELL 18650 Li ion Rechargeable Battery
4. Comes with random color outdoor dry bag
5. Blinking frequency : 60 pulses per minute



AL450 Strobe

LED Aluminium Strobe Light



SPECIFICATIONS

Light source	Cree LED
Light output	450 Lm
Blinking frequency	60 pulses per minute
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	3 x AAA alkaline or Ni-MH batteries
Angle of light beam	270°
Burn time	36 hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 136.7 mm
Weight in air	131 g (including battery)
Buoyancy in seawater	-47 g (including battery)
Switching system	Push button
Lanyard	Included



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. Blinking frequency : 60 pulses per minute

AL1300

Camouflage NP

Li ion Rechargeable Battery
Narrow Beam LED Light



Available in 4 colors

SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy, Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. FILREDNP Red filter for AL1300NP. Sold separately.
4. BATCELL 18650 Li ion Rechargeable Battery
5. Our light can fit in glove or pouch. Sold separately.
6. Comes with random color outdoor dry bag

Upgraded

Slim
Size

1300
lumens

AL450

Camouflage NM Tail II Spotter

Narrow Beam Aluminum LED Light
with Tail Switch Button



Available in 2 colors

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.33 x L.121.7mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 150g (including batteries) weight in air
- -70g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450NM Tail II LED with Glove
4. AL 450NM Tail II LED with Pouch
5. AL 450NM Tail II LED with Pouch and Glove

NEW

450
lumens

AL450 Camouflage WM Tail

450 lumens

LED Aluminum Diving Light with Tail Switch Button



Available in 2 colors

SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450WM Tail LED with Glove
4. AL 450WM Tail LED with Pouch
5. AL 450WM Tail LED with Pouch and Glove

AL250 Camouflage

250 lumens


Multi-Function Aluminum LED Light



Available in 2 colors

SPECIFICATIONS

Light source	1 x XPG LED
Light output	250 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	2xAAA alkaline or Ni-MH batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	Up to 2 hrs
Maximum depth	100 m tested
Size	Dia. 28 x L. 147.8 mm
Weight in air	135 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Front glass	Tempered optical glass
Lanyard	Included

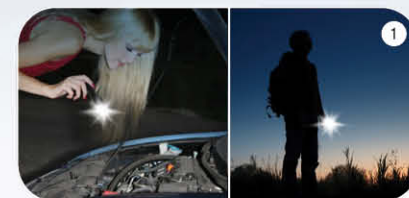

1. Light is suitable for multi-function
2. Operate with 2xAAA batteries
3. Our light can fit in glove or pouch. Sold separately.



AL1300 NP Tail

Li ion Rechargeable Battery
Narrow Beam LED Light with
Tail Switch Button



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 33.2 x L. 152.2 mm
Weight in air	189 g (including battery)
Buoyancy in seawater	-87 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 Levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- FILREDNP Red filter for ALI300NP Tail. Sold separately.
- BATCELL 18650 Li ion Rechargeable Battery
- Our light can fit in glove or pouch. Sold separately.
- Protective case for AL 1300NP Tail. Sold separately.
- Comes with random color outdoor dry bag



AL1300 WP Tail

Li ion Rechargeable Battery
Wide Beam LED Light with
Tail Switch Button



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 137.7 mm
Weight in air	177 g (including battery)
Buoyancy in seawater	-88 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included

- 4 Levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Comes with the clip for easy system setup
- Snoot Connector for ALI300WP Tail. Sold separately.
- BATCELL 18650 Li ion Rechargeable Battery
- Removable red and yellow filters enhances focusing performances and warm color tone
- Our light can fit in glove or pouch. Sold separately.
- Protective case for AL 1300WP Tail. Sold separately.
- Comes with random color outdoor dry bag

AL1300 NP

Li ion Rechargeable Battery
Narrow Beam LED Light



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	10° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	150 m tested
Size	Dia. 33.2 x L. 139.8 mm
Weight in air	168 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



- 4 Levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- FILREDNP Red filter for AL1300NP. Sold separately.
- BATCELL 18650 Li ion Rechargeable Battery
- Our light can fit in glove or pouch. Sold separately.
- Protective case for AL 1300NP. Sold separately.
- Comes with random color outdoor dry bag

AL1300 WP

Li ion Rechargeable Battery
Wide Beam LED Light



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



- 4 Levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Comes with the clip for easy system setup
- Snoot Connector for AL1300WP. Sold separately.
- BATCELL 18650 Li ion Rechargeable Battery
- Removable red and yellow filters enhances focusing performances and warm color tone
- Our light can fit in glove or pouch. Sold separately.
- Protective case for AL 1300WP. Sold separately.
- Comes with random color outdoor dry bag

AL1300 XWP

Li ion Rechargeable Battery Extra Wide Beam LED Light



SPECIFICATIONS

Light source	XML LED
Light output	130 Lm (level I), 325 Lm (level II) 650 Lm (level III), 1300 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 122.1 mm
Weight in air	160 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 Levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Comes with the clip for easy system setup
- Snoot Connector for AL1300XWP. Sold separately.
- BATCELL 18650 Li ion Rechargeable Battery
- Removable red and yellow filters enhances focusing performances and warm color tone
- Our light can fit in glove or pouch. Sold separately.
- Protective case for AL 1300XWP. Sold separately.
- Comes with random color outdoor dry bag

AL1200 RAFO

Li ion Rechargeable Battery Wide Beam LED Light with Auto-Flash Off Function



SPECIFICATIONS

Light source	XML LED + 2 x XPE Red LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV) 150 Lm
Light output (Red collar mode)	150 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	55° wide beam
Color temperature	6500K
AFO interval	0.2sec. +/- 0.1 sec.
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 42.4 x L. 128.3 mm
Weight in air	242 g (including battery)
Buoyancy in seawater	-129 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included

- 4 Levels of brightness and SOS controlled by a reliable push button design
- Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
- Comes with ball joint for easy system setup
- Automatic Flash Off Function AFO interval: 0.2 sec. +/- 0.1 sec.
- Built-in red color led enhances focusing performance
- BATCELL 18650 Li ion Rechargeable Battery
- Comes with random color outdoor dry bag

AL450 WM Tail

LED Aluminum Diving Light
with Tail Switch Button

450
lumens



SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.36 x L.122.6mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 40°
- Up to 4hrs of burn time
- Lanyard included
- 160g (including batteries) weight in air
- -74g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450WM Tail LED with Glove
4. AL 450WM Tail LED with Pouch
5. AL 450WM Tail LED with Pouch and Glove

AL450 NM Tail II Spotter

Narrow Beam Aluminum LED Light
with Tail Switch Button

NEW

450
lumens



SPECIFICATIONS

- 450 Lumens Cree LED
- Size : Dia.33 x L.121.7mm
- Aluminum Alloy, anti-corrosive anodized
- 3xAAA alkaline or Ni-MH batteries
- Angle of light beam: 8°
- Up to 4hrs of burn time
- Lanyard included
- 150g (including batteries) weight in air
- -70g (including batteries) buoyancy in seawater
- Switching System : Push Button



1. Push on / off button on the bottom
2. 3xAAA stand-alone battery holder
3. AL 450NM Tail II LED with Glove
4. AL 450NM Tail II LED with Pouch
5. AL 450NM Tail II LED with Pouch and Glove

250
lumens

AL250

Multi-Function Aluminum
LED Light

SPECIFICATIONS

Light source	1 x XPG LED
Light output	250 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	2xAA alkaline or Ni-MH batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	Up to 2 hrs
Maximum depth	100 m tested
Size	Dia. 28 x L. 147.8 mm
Weight in air	135 g (including battery)
Buoyancy in seawater	-85 g (including battery)
Front glass	Tempered optical glass
Lanyard	Included



1. Light is suitable for multi-function
2. Operate with 2xAA batteries
3. Our light can fit in glove or pouch. Sold separately.
4. Available in 5 colors



RGB White II

Li ion Rechargeable Battery
4 Colors LED Light

SPECIFICATIONS

Light source	LED
Light output	500 Lm (white), 120 Lm (red) 40 Lm (blue), 300 Lm (green)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	85° wide beam
Color temperature	6500K
Burn time	2 hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 126.3 mm
Weight in air	162 g (including battery)
Buoyancy in seawater	-84 g (including battery)
Switching system	Push button with battery indicator
Front glass	Concave lens
Lanyard	Included



1. 4 colors of light and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Comes with the clip for easy system setup
4. BATCELL 18650 Li ion Rechargeable Battery
5. Built-in red color Led
6. Built-in green color Led
7. Built-in blue color Led
8. Snoot Connector for RGB White II. Sold separately.
9. Our light can fit in glove or pouch. Sold separately.
10. Comes with random color outdoor dry bag

CF1800_P

Li ion Rechargeable Battery
Changeable Focus
LED Light



SPECIFICATIONS

Light source	XML LED
Light output	180 Lm (level I), 450 Lm (level II) 900 Lm (level III), 1800 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 26650
Angle of light beam	7° narrow beam to 37° wide beam
Color temperature	6500K
Burn time	1.5 hrs (level IV), 3 hrs (level III) 6 hrs (level II) and 15 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 169.3mm
Weight in air	301 g (including battery)
Buoyancy in seawater	-146 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Twist the front to change the focus (Turning force increases with depth)
4. BATCELL 26650 Li ion Rechargeable Battery
5. Comes with USB charger
6. Comes with random color outdoor dry bag

CF1200_{P II}

Li ion Rechargeable Battery
Changeable Focus
LED Light



SPECIFICATIONS

Light source	XML LED
Light output	120 Lm (level I), 300 Lm (level II) 600 Lm (level III), 1200 Lm (level IV)
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	Li ion Rechargeable battery pack 18650
Angle of light beam	7° narrow beam to 37° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 5 hrs (level III) 10 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 169.3mm
Weight in air	245 g (including battery)
Buoyancy in seawater	-121 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass
Lanyard	Included



1. 4 Levels of brightness and SOS controlled by a reliable push button design
2. Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color
3. Twist the front to change the focus (Turning force increases with depth)
4. BATCELL 18650 Li ion Rechargeable Battery
5. Comes with random color outdoor dry bag

CF450_M

Changeable Focus LED Light



Available in 2 colors

SPECIFICATIONS

Light source	Cree LED
Light output	450 Lm
Casing material	Aluminum alloy. Anti-corrosive anodized
Power source	3xAAA alkaline or Ni-MH batteries
Angle of light beam	7° to 37°adjustable
Color temperature	6500K
Burn time	Up to 4hrs
Maximum depth	100 m tested
Size	Dia. 35.5 x L. 121.5mm
Weight in air	193 g (including batteries)
Buoyancy in seawater	-81 g (including batteries)
Switching system	Magnetic Swivel
Front glass	Tempered optical glass & Convex Lens
Lanyard	Included



1. Twist the front to change the focus (Turning force increases with depth)
2. Magnetic Swivel Switch allows for one hand operation
3. 3xAAA stand-alone battery holder
4. CF 450 M LED with Glove
5. CF 450 M LED with Pouch
6. CF 450 M LED with Pouch and Glove

EASY CLIP Rainbow Color Light



SPECIFICATIONS

- Available fifteen color output –Red, Green, Orange, Blue, Purple, Yellow, Light Blue, Flash red, Flash green, Flash orange, Flash blue, Flash purple, Flash yellow, Flash light blue automatically run all fourteen modes.
- 12-24 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

EASY CLIP Light with Flash



SPECIFICATIONS

- Available six color output – Blue, Red, Green, Flash Blue, Flash Red, Flash Green
- Up to 36 hrs of burn time
- 2 x CR2032 batteries
- Dia. 32 x L. 38mm
- 100 meter tested
- Lanyard included
- 23g (including batteries) weight in air
- -3g (including batteries) buoyancy in seawater

HL1000_N

1000 lumens

Li ion Rechargeable Battery Narrow Beam LED Head Light


 FILREDHLN Red filter for HL 1000N.
Sold separately.


SPECIFICATIONS

Light source	Cree LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41 mm
Weight in air	205 g (including battery)
Buoyancy in seawater	-74 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness and SOS controlled by a reliable push button design



BATCELL18650 Li ion Rechargeable Battery



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

HL450_N

450 lumens

Narrow Beam LED Head Light


 FILREDHLN Red filter for HL 450N.
Sold separately.


SPECIFICATIONS

Light source	Cree LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	8° narrow beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 41 mm
Weight in air	187 g (including batteries)
Buoyancy in seawater	-56 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



4 levels of brightness and SOS controlled by a reliable push button design



3 x AAA alkaline batteries



Battery level indicator built-in: Blue color / Green color / Red color / Flash Red color

HL1000_{xw}

1000 lumens


Li ion Rechargeable Battery Extra Wide Beam LED Head Light



Built-in red color led enhances focusing performance

SPECIFICATIONS

Light source	2 x Cree LED + 2 x XPE Red LED
Light output	100 Lm (level I), 250 Lm (level II) 500 Lm (level III), 1000 Lm (level IV)
Light output (Red color mode)	150 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	Li ion Rechargeable battery pack BATCELL18650
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8mm
Weight in air	207 g (including battery)
Buoyancy in seawater	-76 g (including battery)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



HL450_{xw}

450 lumens


Extra Wide Beam LED Head Light



Built-in red color led enhances focusing performance

SPECIFICATIONS

Light source	2 x Cree LED + 2 x XPE Red LED
Light output	45 Lm (level I), 113 Lm (level II) 225 Lm (level III), 450 Lm (level IV)
Light output (Red color mode)	100 Lm
Casing material	Aluminum alloy light head and Polycarbonate body
Power source	3 x AAA alkaline batteries
Angle of light beam	120° wide beam
Color temperature	6500K
Burn time	2 hrs (level IV), 4 hrs (level III) 8 hrs (level II) and 20 hrs (level I)
Maximum depth	100 m tested
Size	Dia. 36.8 x L. 84.4 mm with light head dia. 38.8 mm
Weight in air	189 g (including batteries)
Buoyancy in seawater	-58 g (including batteries)
Switching system	Push button with battery indicator
Front glass	Tempered optical glass



Green Spot light & Red Spot light



SPECIFICATIONS

GREEN SPOT LIGHT

RED SPOT LIGHT

Light source : Green Laser
 Light output : Below 1 mW
 Casing material : Aluminum alloy.
 Anti-corrosive anodized
 Power source : 2 x AAA alkaline or Ni-MH batteries
 Wavelength : 520nm
 Burn time : Up to 12 hrs
 Maximum depth : 100 m tested
 Size : Dia. 19 x L. 168.6 mm
 Weight in air : 89 g (including batteries)
 Buoyancy in seawater : -54 g (including batteries)
 Switching system : Twisting Bezel
 Front glass : Tempered optical glass
 Lanyard : Included

Red Laser
 Below 1 mW
 Aluminum alloy.
 Anti-corrosive anodized
 2 x AAA alkaline or Ni-MH batteries
 650nm
 Up to 12 hrs
 100 m tested
 Dia. 19 x L. 154.1 mm
 82 g (including batteries)
 -51 g (including batteries)
 Twisting Bezel
 Tempered optical glass
 Included



Operate with 2 x AAA batteries



CLIPMNTSPOT
 Mounting clip for Green Spot Light and Red Spot Light. Sold separately.

Protective Case Series



Model :	PC101 A	PC102 A	PC103 A	PC104 A	PC105 A	PC106 A
Outer Dimension :	225 x 180 x 100 mm	350 x 270 x 120 mm	340 x 310 x 120 mm	360 x 285 x 190 mm	420 x 360 x 130 mm	420 x 360 x 190 mm
Inner Dimension :	200 x 135 x 85 mm	325 x 210 x 110 mm	310 x 250 x 107 mm	330 x 270 x 175 mm	380 x 310 x 120 mm	380 x 310 x 180 mm

FLUORODIVE Kit sets

Science has discovered corals contain Fluorescent Proteins invisible to the naked eye that jump into view using innovative high-intensity fluorolights and filters.

Bigblue Fluorodive Kits provide everything you need to experience this incredibly beautiful effect. You get specially designed filters to precisely match the coral fluorescence wavelength, and yellow blue-barrier filters to increase the intensity of the colors emitted by the corals. Our innovative design is the only one that allows you to easily switch between blue and white light to accommodate changes in dive conditions.

These kits are suitable for night divers, resorts, science institutions, ecological monitoring groups and specialty photographers. Truly there is nothing that can match the beauty of witnessing coral fluorescence on your next night dive!



Photos of the fluorescence stimulated by the specific wavelength and captured through a barrier filter

FDK35	CF450M / CF1200P II / AL1300WP / AL1300XWP / AL1300WP Tail / AL1800WP / CF1800P / BLACK MOLLY IV / BLACK MOLLY V / Fluorodive Kit
FDK38	CF450 / CF1200P / AL1200WP / AL1200XWP / AL1200WP Tail / BLACK MOLLY II / BLACK MOLLY III Fluorodive Kit
FDK44	VL4600P / VTL2600P Fluorodive Kit
FDK55	VTL4200P / VL11000P / VL9000P Tri Color Fluorodive Kit
FDK63	CF7200P / CB10000P / VTL8000P / VTL8000P Max / VTL10000P / Fluorodive Kit



Blue Filter


Yellow Mask

Camera Filters

Camera filters are available for you to capture the macro or wide angle photos or videos of the memorable aquatic creatures.

FILFLUOR015000

Fluorodive filter for VL 18000P Pro Mini / VL 18000P Pro Mini Tri Color / CB15000P

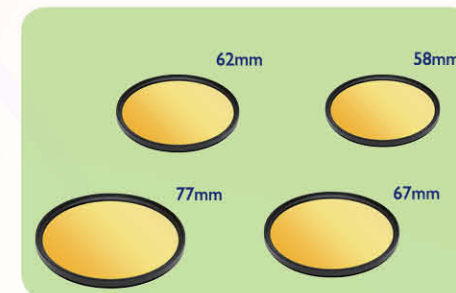

COMBO PACK SERIES

AL 450 NM Tail II Spotter
Narrow Beam Aluminum LED Light with Tail Switch Button

AL 1300NP

Li ion Rechargeable Battery Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 450 NM Tail II Spotter
Narrow Beam Aluminum LED Light with Tail Switch Button

AL 1300WP

Li ion Rechargeable Battery Wide Beam LED Light

Easy Clip Rainbow Color light



AL 250
Multi-Function Aluminum LED Light

AL 1300NP

Li ion Rechargeable Battery Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail
LED Aluminum Diving Light with Tail Switch Button

AL 1300NP

Li ion Rechargeable Battery Narrow Beam LED Light

Easy Clip Rainbow Color light



AL 450 WM Tail
LED Aluminum Diving Light with Tail Switch Button

AL 1300WP

Li ion Rechargeable Battery Wide Beam LED Light

Easy Clip Rainbow Color light



AL 250
Multi-Function Aluminum LED Light

AL 1300WP

Li ion Rechargeable Battery Wide Beam LED Light

Easy Clip Rainbow Color light



CAMERA TRAY 34



Camera Tray 34 with 34cm long tray.
Two 1" Ball joint arms with no-slip grip.
Compatible with Smart Phone Housings
e.g. Iphone, Samsung, Huawei


CAMERA TRAY 27



Camera Tray 27 with 27cm long tray.
Two 1" Ball joint arms with no-slip grip.
Compatible with Olympus TG4/TG5 Housings.

BBGPTray

Go Pro Tray



Go Pro Hot Shoe Adapter



Go Pro Light Adaptor



Go Pro Kit sets

GP4200 Kit

- 1 pc. of Double Clip (CLP02)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Light not included



GP450 Kit

- 2 pcs. of Mounting Clip (CLIPMINTCF)
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



GP1300 Kit

- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)
- Lights not included



Protective Case for Go Pro Tray Kit Set

- 1 pc. of ALI300VWP
- 1 pc. of ALI300XWVP
- 2 pcs. of Double Clip (CLP02)
- 2 pcs. of Sea & Sea Standard (DA009)
- 1 pc. of Go Pro Tray (BBGPTRAY)



EXTENDGPTRAY

Extendable Go Pro Tray



Extend from 176mm to 287mm

SINGLEARMTRAY

Single Arm Go Pro Tray



FLEXIGPTRAY

FLEXISINGLEARMTRAY

FLEXIEXTENDGPTRAY

7" Flexi Arm
Go Pro Tray



7" Flexi Arm Single Arm Tray



7" Flexi Arm Extendable
Go Pro Tray



TRIPOD PLATE



Size: W.112 x L.272mm
Comes with four 1" Ball joint



Easy assemble with double clip and arms.
Double clip and arms sold separately.

Batteries & Chargers



BATCELL18650

Battery for ALI300NP / ALI300WP / ALI300XWP / ALI300NP Tail / ALI300VWP Tail / CF1200P II / ALI200RAFO / HL1000XW / HL1000N / RGBWhite II / ALI200NP IR / ALI200WP IR / ALI300 Strobe



BATCELL26650

Battery for Black Molly IV / Black Molly V / Black Molly VB / ALI1800NP II / ALI1800WP / CF1800P



BATCELL32650

Battery for VL4600P / VTL4200P / TL3800P / VTL2600P / TL2600P / VL4600PB



CR2032

Battery for Easy Clip Light / Controller



BATCELL18650x3

Battery for CB 4000P



BATCELL18650x4

Battery for VL11000P / VTL8000P / VTL8000P Max / TL5200P / VL9000P Tri Color / VTL10000P / VL10000PBR



BATCELL21700x4

Battery for CB7200P / CB10000P / CB7200PB / CB10000PBR



BATCELL18650x7

Battery for VL18000P Pro Mini / VL18000P Pro Mini Tri Color / CB15000P / TL8000P / VL18000PBR / CB15000PBR

Batteries & Chargers



BATCELLCANISTER

Battery for TL5200P Backmount / Sidemount / VTL8000P Backmount / Sidemount



BATCELL18650x4SUPREME

Battery for TL3800P Supreme



BATCELL21700x8

Battery for VL36000P / CB30000P II / VL33000PBR



BATCELL60000

Battery for VL65000P / CB60000P



BATCHR60000

Charger for VL65000P / CB60000P



BATCHR21700x8

Charger for VL36000P / CB30000P II / VL33000PBR



BATCHR18650x7

Charger for VL18000P Pro Mini / VL18000P Pro Mini Tri Color / CB15000P / TL8000P / VL18000PBR / CB15000PBR



BATCHR21700x4

Charger for CB7200P / CB10000P / CB7200PB / CB10000PBR



BATCHR18650x3

Charger for CB4000P



BATCHR18650x4

Charger for VL11000P / VTL8000P / TL5200P / VL9000P Tri Color / VTL8000P Max / VL10000PBR / VTL10000P



BATCHR18650x4 SUPREME

Charger for TL3800P Supreme



BATCHR32650/26650

Charger for Black Molly IV / Black Molly V / VTL2600P / TL2600P / Black Molly VB



BATCHRCANISTER

Charger for TL5200P Backmount / Sidemount / VTL8000P Backmount / Sidemount



BATCHR18650

Charger for ALI300NP / ALI300WP / ALI300XWP / ALI300NP Tail / ALI300VWP Tail / CF1200P II / ALI200RAFO / HL1000XW / HL1000N / RGBWhite II / ALI200NP IR / ALI200WP IR / ALI300 Strobe



BATCHRUSB

Charger for VL4600P / VTL4200P / TL3800P / VL4600PB / ALI1800NP II / ALI1800WP / CF1800P / BATCELL18650 / BATCELL26650 / BATCELL32650

Accessories



AF 55

Ambient filter for VL11000P / VL10000PBRC / VL9000P Tri Color
For 10-15 meter depth



AF 63

Ambient filter for CB7200P / CB7200PB / CB10000P / CB10000PBRC
For 10-15 meter depth



AF 70

Ambient filter for VL18000P Pro Mini / VL18000P Pro Mini Tri Color / VL18000PBRC / CB15000P / CB15000PBRC
For 10-15 meter depth



AF 85

Ambient filter for VL36000P / VL33000PRC / CB30000P II
For 10-15 meter depth



AF 55-LB

Ambient filter for VL11000P / VL10000PBRC / VL9000P Tri Color
For 5-10 meter depth



AF 63-LB

Ambient filter for CB7200P / CB7200PB / CB10000P / CB10000PBRC
For 5-10 meter depth



AF 70-LB

Ambient filter for VL18000P Pro Mini / VL18000P Pro Mini Tri Color / VL18000PBRC / CB15000P / CB15000PBRC
For 5-10 meter depth



AF 85-LB

Ambient filter for VL36000P / VL33000PRC / CB30000P II
For 5-10 meter depth

CONTROLLER

Remote Control for VL33000PRC / VL18000PBRC / CB15000PBRC / VL10000PBRC / CB10000PBRC



2M OPTICAL FIBRE

2 Meters Optical fibre for VL33000PRC / VL18000PBRC / CB15000PBRC / VL10000PBRC / CB10000PBRC



OPTICAL FIBRE

1 Meter Optical fibre for VL33000PRC / VL18000PBRC / CB15000PBRC / VL10000PBRC / CB10000PBRC



TLGGLOVE

Goodman glove for any light with a two-prong mounting square



NPGGLOVE

Neoprene glove for Mini Light




NPGGLOVE

Neoprene glove for AL1300NP / AL1300WP / AL1300XWP / AL1300NP Tail / AL1300WP Tail / AL1200NP IR / AL1200WP IR




PISTOLGRIPHANDLE

Pistol Grip Handle for any light with a two-prong mounting square



GHA-01C

Goodman handle with connector for any light with a two-prong mounting square



SFGHA-01C

Slim Fit Goodman handle with connector for any light with a two-prong mounting square

Accessories



LNTHANDLE

Lantern style handle



FILFLUORO I5000

Fluorodive filter for CB15000P / VL18000P Pro Mini / VL18000P Pro Mini Tri Color



FDMASKYL

Yellow filter for Fluorodiving



YELLOW PLATE

Yellow plate for Fluorodiving



SNOOT 35

Snoot Connector for ALI300WP / ALI300XWP / ALI300WP Tail / RGB White II / ALI800WP



SNOOT 38

Snoot Connector for ALI200WP / ALI200XWP / ALI200WP Tail / RGB White



SNOOT 55

Snoot Connector for VL6000P



SNOOT 63

Snoot Connector for CB7200P / CB10000P / CB7200PB / CB10000PBRC



FILRED35

Red filter for ALI300WP / ALI300XWP / ALI300WP Tail / ALI800WP



FILREDSM

Red filter for ALI200WP / ALI200XWP / ALI200WP Tail



FILRED63

Red filter for VTL10000P



FILREDNP

Red filter for ALI300NP / ALI300NP Tail



FILREDHLN

Red filter for HL1000N / HL450N



FILYELLG

Yellow filter for VTL4200P / VL1000P / VL10000PBRC



FILYEL35

Yellow filter for ALI300WP / ALI300XWP / ALI300WP Tail / Black Molly V / Black Molly VB / ALI800WP



FILYEL44

Yellow filter for VL4600P / VL4600PB / VTL2600P



FILYEL63

Yellow filter for VTL8000P / VTL8000P Backmount / Sidemount / VTL8000P Max / VTL10000P



FILYELSM

Yellow filter for ALI200WP / ALI200XWP / ALI200WP Tail / Black Molly III



CLIPMNTSPOT

Mounting clip for Green Spot Light / Red Spot Light



CLIPMNTAL

Mounting clip for ALI300WP / ALI300XWP / CF1200P II / ALI200WP IR



CLIPMNTCF

Mounting clip for CF450M / AL450WM Tail / ALI300WP Tail



GO PRO MOUNT

Go Pro Mount for Go Pro Camera



1" BALL JOINT

1" Ball Joint fit for any light with a two-prong mounting square



SPRING CORD

Length : 330mm



EASY RELEASE MOUNT

Easy Release Mount fit for helmet / DPV



NPHOODMS

Neoprene hood for one light holster



NPHOODMD

Neoprene hood for two light holster



NPRPOUCH

Neoprene pouch with retractor for ALI300NP / ALI300WP / ALI300XWP / ALI300NP Tail / ALI300WP Tail / ALI200NPIR / ALI200WPIR



NPRPOUCHM

Neoprene pouch with retractor for Mini Light

Accessories

Outdoor Dry Bags




3L	5L	7L	15L	20L
Dia. 140 x L. 330 mm	Dia. 170 x L. 380 mm	Dia. 180 x L. 510 mm	Dia. 240 x L. 540 mm	Dia. 240 x L. 600 mm
Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 5 colors Yellow, Green, Pink, Light Blue, Blue	Available in 6 colors Yellow, Green, Pink, Light Blue, Blue, Black	Available in 5 colors Yellow, Green, Blue, Black, Orange	Available in 5 colors Yellow, Green, Blue, Black, Orange

Easy Release Mount Series



Photo/Video Arms & Accessories

Float Arms Series



9" Float Arm

Dia. 70 x 228mm
Weight above water : 281g
Buoyancy lift : 360g



9" Jumbo Float Arm

Dia. 90 x 228mm
Weight above water : 349g
Buoyancy lift : 697g



13" Float Arm

Dia. 70 x 330mm
Weight above water : 430g
Buoyancy lift : 612g

Flexi Arms Series



7" Flexi Arm



9" Flexi Arm



6" Flexi Arm
Hot Shoe YS Adapter



6" Flexi Arm
Hot Shoe Ball Adapter



YS Adapter

Photo/Video Arms & Accessories

Clips

- Made of T6061 grade aluminum
- Available in 3 versions: long double clip, double clip and a triple clip
- Ergonomic handle makes it easy to twist on and off



Long CLP02 Double clip

Length : 80mm



CLP 02 Double clip

Length : 63mm



CLP 03 Triple clip

Arms

- Full T6061 grade aluminum
- Available in 4 lengths: 5", 8", 12", 16"



5" Arm



8" Arm



12" Arm



16" Arm

For 1" ball joint to connect to extend the connection



DA Series



DA001

Hot Shoe Adapter



DA002

Sea & Sea Adapter



DA003

Light & Motion Adapter



DA004

Standard Dovetail Plate



DA005

8mm Thread



DA006

Sea & Sea Light Adapter



DA007

Sea & Sea Hot Shoe Adapter



DA008

Sea & Sea Medium



DA009

Sea & Sea Standard



DA010

Base Plate Ball Mount



DA011

T-Groove Adapter



DA012

Universal Mount Base



DA013F

1/4" Thread Adapter



DA013M

1/4" Thread Adapter



DA014

Ikelite 200 Strobe Adapter



DA015

Single Ball Arm with Sea & Sea Adapter



DA016

UK Light Adapter



DA017

Standard Dovetail



DA018

Inon Z Series Strobe Adapter



DA022

Slot Stay



DA023

6mm Thread Adapter

Specifications subject to change without prior notice.



highblue®

Lifestyle

OUTDOOR ADVENTURE GEAR



30L Backpack
Camouflage

Size : Dia. 270 x L.670 mm
Available in 3 colors
Camo Blue, Camo Brown.
Camo Green



3L Outdoor Dry Bag
Camouflage

Size: Dia. 140 x L.330 mm
Available in 3 colors
Camo Blue, Camo Brown.
Camo Green



Sport Water Bottle

Size: Dia. 80 x L.273 mm
Volume: 800mL (27 oz)
Weight : 360g
Available in 2 colors
Black, Blue

Our Distributors & Dealers



Aruba / Bonaire / Curacao Distributor :
Palm Trading Bonaire NV
Contact Person : Joyce Sonneveld
E-mail : sales@palmtradingnv.com
Phone : 599 717 2072
Mail : Hanchi Amboina 5, Kralendijk
Bonaire Dutch Caribbean



Australia Distributor : Adreno
Contact Person : Clive Lewis
E-mail : clive@adreno.com.au
Phone : 61-07-3391-2299
Mail : 54-58 Deshon Street, Woolloongabba,
Brisbane, QLD 4102, Australia



Austria Distributor :
Custom Diving Systems
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



**Belgium/ Netherlands / Luxembourg
Distributor : Custom Diving Systems**
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Brazil Distributor : Seasub
Contact Person : Pablo Y. Varela
E-mail : pablo@seasub.com.br
Phone : 55-11-38328342
Mail : Rua Baumann, 1039/1051,
Cep 05318000,
Sao Paulo, Brazil



Canada Distributor :
Pacific Scuba Industries
Contact Person : Michael Joseph &
Laura Valente
E-mail : laurabigblue@outlook.com
Phone : 778-834-0184
Mail : Unit A11-33733 King Road
Abbotsford, BC,
V2S 7M9, Canada



Czech Republic Distributor : Olson S.R.O
Contact Person : Sales Office
E-mail : olson@olson.cz
Phone : 420 220 805 300
Mail : Bubenske Nabrezi 306/16 ,
Holesovicka Trznice – Hala 16
170 00, Prague 7
Czech Republic



France / Europe Distributor :
Custom Diving Systems
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Germany Distributor :
Custom Diving Systems
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Greece / Croatia Distributor :
Custom Diving Systems
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Indonesia Distributor : Divesea Indonesia
Contact Person : Chatra Hapsoro
E-mail : bigblue.id@gmail.com
Phone : 62-82145490450
Mail : Metro Park Residence, Unit MA-LG-05,
JL. Pilar Mas Utama Raya Kav 28,
Kebon Jeruk, Jakarta Barat 11520 Indonesia



Italy/ Malta Distributor :
Custom Diving Systems
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Japan Distributor : Zero Co., Ltd.
Contact Person : Katsuhiko Saotome
E-mail : zero@zero-zero.co.jp
Phone : 81-3-5721-1906
Fax: 81-3-5721-1910
Mail : 1-11-5 Takaban, Meguro-Ku,
Tokyo, Japan



Korea Distributor : King Sports
Contact Person : Mr. Chang / Yun Hee Chang
E-mail : kingdive@kingsports.co.kr
Phone : 82-2-3628251
Mail : 35-4, 1GA, Manri-Dong, Chung-Gu,
Seoul, Korea



Kuwait Dealer : Ilmunz Marine Co.
Contact Person : Abdulrahman Al-Serheed
E-mail : ilmunz@ilmunz.com
Phone : +965 95500969
Mail : Creative Design Center , Block 1 , Street 10,
Building 63, Store 2.2,
Shuwaikh Industrial 1, Kuwait



Malaysia Distributor :
Rainbow Runner Sdn Bhd
Contact Person : Sim
E-mail : ops@rainbowrunner.net
Phone : 60-341-622837
Fax: 60-341-617837
Mail : 5, Ukay Boulevard, Jalan Lingkaran
Tengah 2, Hulu Kelang, 68000 Ampang,
Selangor, Malaysia



Maldives Dealer : Sea Gear
Contact Person : Hussen Abdulla
E-mail : sales@seagear.com.mv
Phone : +960 3302737
Mail : M. Araliya – Ground Floor – Alhivilaa Magu,
20292 Male, Maldives



Mexico Distributor :
Comercializadora UNIF Sa De CV
Contact Person : Tristan Termat
E-mail : tristan@unifmexico.com.mx
Phone : + 52 984 80 311 68
Mail : Calle 4 nte Mza 42 Lote 4-1 Local B Entre
25 y 30 Avenida Col. Centro Localidad :
Playa del Carmen, Q. Roo Municipio :
Solidaridad CP: 77710 Mexico



New Zealand Distributor : Sea Tech Ltd.
Contact Person : Dave Moran
E-mail : info@seatech.co.nz
Phone : 64-9-5210684
Mail : 47 Tautari St. Orakei. Auckland 1071,
New Zealand



Philippines Distributor :
Dive Supply Subic, INC.
Contact Person : Rowena Merto
E-mail : muriel@aquaventurewhitetip.com
Phone : 63-2-708-9996
Mail : Office 6&7 EMS Building, 14th Street
Subic Gate Perimeter Road, Subic Bay
Freeport Zone, Olongapo City,
2222 ,Philippines



Poland Distributor : Waterfall
Contact Person : Darek
E-mail : darek@waterfall.pl
Phone : 48-600-340-002
Mail : UL. Klimczaka 22D/3, 02-797 Warszawa
Poland PL 7621470585



Scandinavian Distributor : AquaFun AB
Contact Person : Sales Office
E-mail : info@aquafun.se
Phone : 46-0-40-295-300
Mail : Sangleksgatan 4E, 215 79, Malmö,
Sweden



Singapore Distributor :
Divesea Pte Ltd
Contact Person : Fairuz Ahmad
E-mail : team@divesea.com.sg
Phone : 65-85115164
Mail : 90 Lor 23 Geylang
Agraw Building # 01-03
Singapore 388393



South Africa Distributor:
Manex & Power Marine
Contact Person : Gavin Jones
E-mail : gavin.jones@manex.co.za
Phone : 27-021-511-7292
Mail : 9 Paarden Eiland Road, Paarden Eiland,
South Africa



Spain/ Portugal Distributor :
Custom Diving Systems
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



Switzerland Distributor :
Custom Diving Systems
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : +33 0 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



**Russia Distributor : Custom Diving
Systems**
Contact Person : Yannig Charles
E-mail : contact@cds-pro.com
Phone : + 33 (0) 6 114 81 114
Mail : 563, Rue De La Prairie 73350
Bozel , France



**Taiwan Distributor : Indigo Blue Technology
Co. Ltd.**
Contact Person : Rachel Cheng
E-mail : rachel.cheng@weistechnology.com.tw
Phone : 886 2 82271619
Mail : 4F-6, No. 258 Lian Cheng Road,
Chung Ho Dist., New Taipei City 23553
Taiwan, ROC



**Turkey Distributor : K Pro Doga Sporlari
Malzemeleri Tic. Ltd. STI**
Contact Person : Akin Kaftanoglu
E-mail : akinkaftanoglu@yahoo.com
Phone : 90-3124334479
Mail : Bulbulderesi Cad. No.: 23/A, Seyranbaglari,
Ankara, Turkey



U.A.E. Distributor : Senyar Marine Equipment
Contact Person : Abdulla Ai Kindi
E-mail : senyair7@gmail.com
Phone : 971-2-666-9999
Mail : P.O. Box 112790, Abu Dhabi, U.A.E.



United Kingdom / Ireland Distributor :
Liquid Sports Ltd.
Contact Person : Alastair Ansell
E-mail : alastair@liquidsports.co.uk
Phone : 44-0-7585-935522
Mail : 11 Stag Lane, Berkhamsted,
Hertfordshire, HP4 1FJ, UK

bigblue®

THE BRIGHTER IDEA

Headquarters :

Bosk International Company Limited

Contact Person : Oscar Tong

E-mail : oscar@bigblue.com.hk

Phone : 852-3568-0773

Fax: 852-3998-3127

Mail : Room 818,8/F, Po Yip Building, 23. Hing Yip
Street, Kwun Tong, Hong Kong

Website : www.bigbluelights.com

www.bigblue.com.hk

US Sales Office : BoskUSA / Bigblue Dive Lights

Contact Person : Tim Ratcliffe

E-mail : sales@bigbluedivelights.com

Phone : 727-442-2300

Fax: 727-499-7117

Mail : 1710N Hercules Ave, Suite 103, Clearwater,
FL 33765 USA

Visit Us
on Website 



Like Us
on Facebook 

